


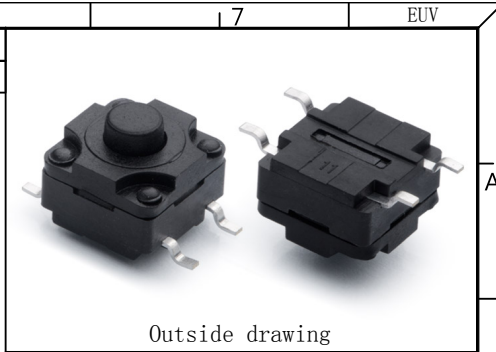

Outside drawing

Ordering information:

EAS-170W-□ □ □ □ □

(1) (2) (3) (4) (5)

(1) Series No.

(2) Height Knob:Reference No. 1

(3) Optional Force:Reference No. 2






(4) Knob Color:

B=Black, R=Red, W=White

(5)Packing mode:

R=Reel Packing

B=Bag Packong

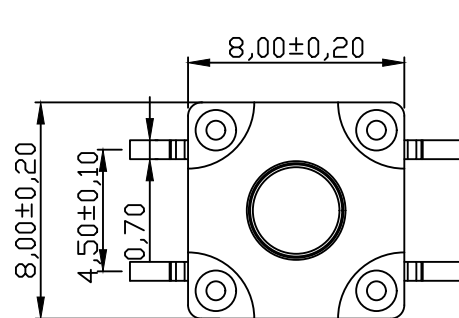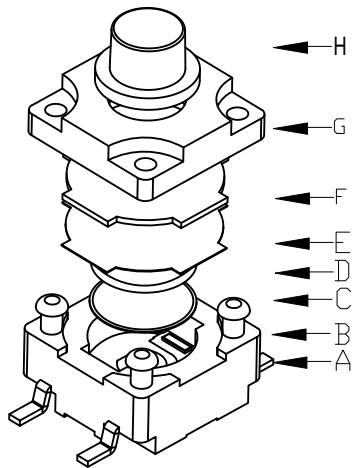

Circuit diagram

NO. 1 (UNIT:mm)			
PART NO	H	PART NO	H
65	6.5	95	9.5
70	7.0	100	10.0
75	7.5	105	10.5
80	8.0	110	11.0
85	8.5	115	11.5
90	9.0	120	12.0

NO. 2 (UNIT:g)	
PART NO	VIGOR
10	100±30
16	160±50
25	250±50
35	350±50

H	Knob/按钮	1	PPA	Black
G	Cover/盖板	1	PPA	Black
F	Waterproof silicone/防水垫	1	Silica gel	Black
E	Dust Cover/防尘膜	1	PI	Yellow
D	Knob/内按钮	1	PPA	Black
C	Contact/弹片	1	F. Ag/SUS301	Silver-coated
B	Base/基座	1	PPA	Black
A	Terminal/引脚	4	Brass	Plating silver
ITEM	NAME	Q' TY	MATERIAC	FINISH

<http://www.euvchn.com>

EUV® EUV ELECTRONICS CO., LTD
兆進電子有限公司

30~Above ±0.30	ANGLE: ∠±1°	TITLE	SMD Tact Seitchs
10~30 ±0.20	SCALE:1:1	PART NO.	EAS-170W-***-R
5~10 ±0.15	SHEET:1 OF 1	APPROVAL	CHECK
0~5 ±0.10	PROJECT	W. Q. LI	X. H. LIN
TOLERANCES ARE (UNIT:mm)	SIZE:A4	K. J. ZENG	DATE
			2025. 01. 01

Specification:

1. Current Range:DC 12V 50mA.

2. Contact resistance:≤50mΩ.

Insulation Resistance:≥100MΩ.

3. Travel: 0.35±0.1mm


4. Operating Force:No. 2.

5. Operating Life:100,000cycles min.

6. Operation temperature range:-20℃~70℃.

7. Preservative temperature range:-20℃~85℃.

8. Waterproof Leve:IP67.

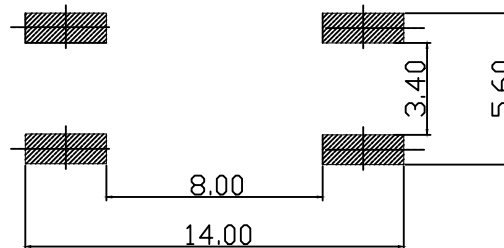

Recommended P.C.B Layout

General Tolerance±0.05