


Outside drawing


Ordering information:
EAS-155-□ □-□-□
(1) (2) (3) (4) (5)
(1) Series No.
(2) Height Knob: Reference No. 1
(3) Optional Force: Reference No. 2
(4) Knob Color:
R=Red, B=Black, W=White
(5) Packing mode:
R=Reel Packing
B=Bag Packong

NO. 1 (UNIT:mm)		
PART NO	H	
25	2. 5	
27	2. 7	
31	3. 1	
34	3. 4	
43	4. 3	
50	5. 0	

NO. 2 (UNIT:gf)		
PART NO	VIGOR	
10	100±30	
16	160±50	
25	250±50	
35	350±50	

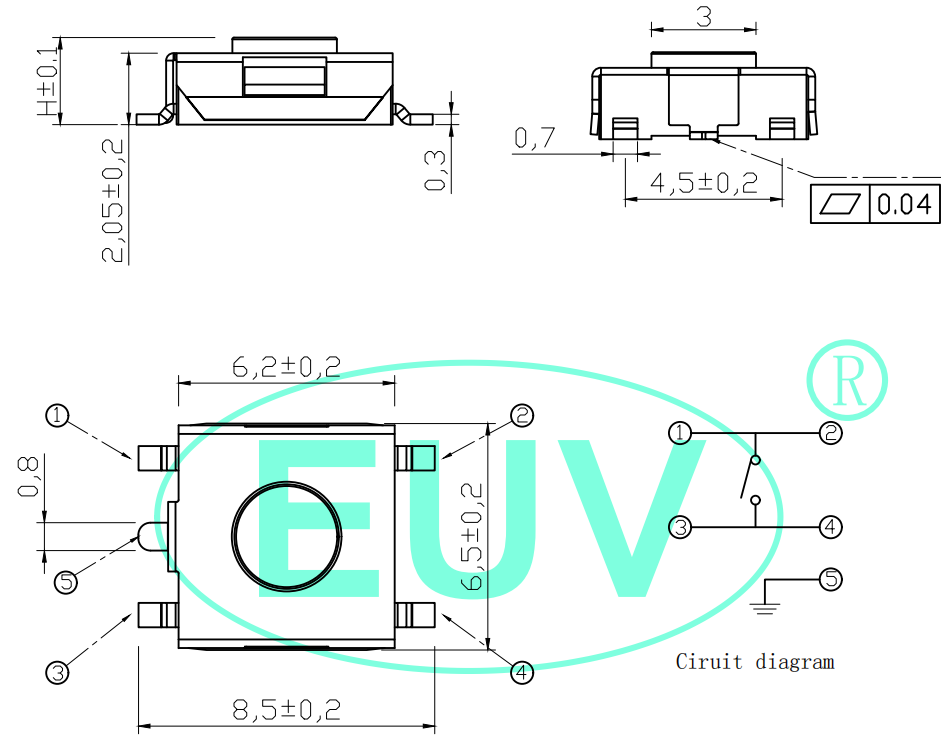

Circuit diagram



Recommended P.C.B Layout
General Tolerance±0.05

Specification:
1. Current Range:DC 12V 50mA.
2. Contact resistance:≤50mΩ.
Insulation Resistance:≥100MΩ.
3. Travel: 0. 25±0. 1mm
4. Operating Force:No. 1.
5. Operating Life:100, 000cycles min.
6. Operation temperature range:-20℃ ~70℃.
7. Preservative temperature range:-20℃ ~85℃.

E	Knob/按钮	1	PPA	Red	
D	Cover/盖板	1	SUS304	Plating Nickel	
C	Contact/弹片	1	F. Ag/SUS301	Silver-coated	
B	Base/基座	1	PPA	Black	
A	Terminal/引脚	4	Brass	Plating Silver	
ITEM	NAME	Q' TY	MATERIAC	FINISH	
http://www.euvchn.com			EUV ® EUV ELECTRONICS CO., LTD 兆進電子有限公司		
30~Above ±0.30	ANGLE: ∠±1°				
10~30 ±0.20	SCALE:1:1	TITLE	SMD Tact Seitchs		
5~10 ±0.15	SHEET:1 OF 1	PART NO.	EAS-155-**-R-R		
0~5 ±0.10	PROJECT 	APPROVAL	CHECK	DRAWN	DATE
TOLERANCE (UNIT:mm)	SIZE:A4	W. Q. LI	X. H. LIN	K. J. ZENG	2025.01.01