



http://www.euvchn.com		 EUV ELECTRONICS CO., LTD 兆進電子有限公司			
30~Above ±0.30	ANGLE: $\angle \pm 1^\circ$	TITLE		2.00mm Connectors (90° SMT)	
10~30 ±0.20	SCALE: 1:1	PART NO.		EN200KSWT-**-***-*	
5~10 ±0.15	SHEET: 1 OF 1	PROJECT 		APPROVAL	CHECK
0~5 ±0.10	TOLERANCES ARE (UNIT:mm)	W. Q. LI	X. H. LIN	DRAWN	DATE
SIZE: A4		2024. 06. 06			



EN200KSWT-**-* * *-*

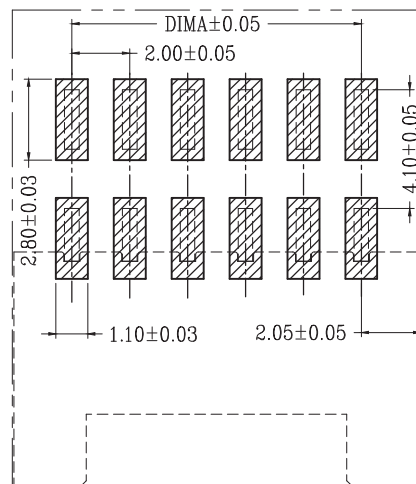
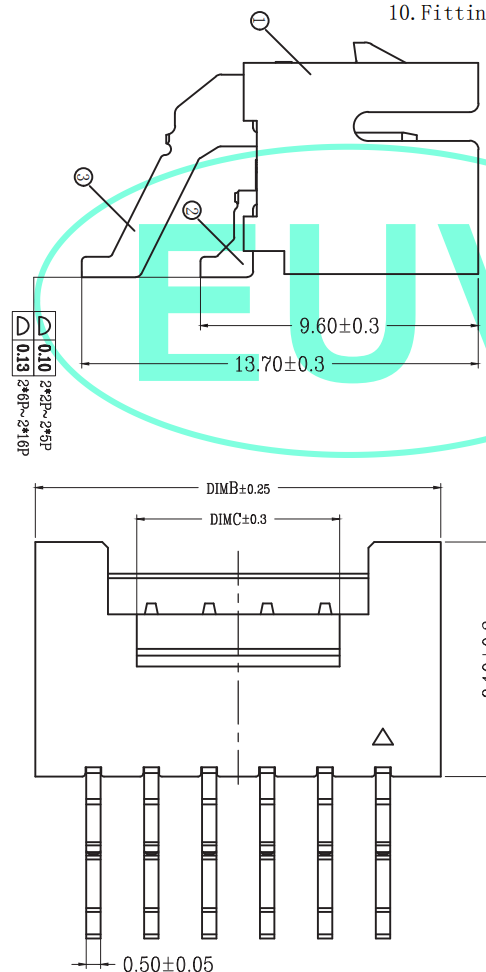
NO OF Poles

L=LCP

W=White

Pin number:

Poles	DIM A	DIM B	DIM C	Poles	DIM A	DIM B	DIM C
2X2P	2.00	6.00	3.20	2X12P	22.00	26.00	19.00
2X3P	4.00	8.00	3.20	2X13P	24.00	28.00	21.00
2X4P	6.00	10.00	3.00	2X14P	26.00	30.00	23.00
2X5P	8.00	12.00	5.00	2X15P	28.00	32.00	25.00
2X6P	10.00	14.00	7.00	2X16P	30.00	34.00	27.00
2X7P	12.00	16.00	9.00	2X18P	34.00	38.00	31.00
2X8P	14.00	18.00	11.00	2X20P	38.00	42.00	35.00
2X9P	16.00	20.00	13.00	2X22P	42.00	46.00	39.00
2X10P	18.00	22.00	15.00				
2X11P	20.00	24.00	17.00				

General Tolerance ± 0.05 

Specifications:

1. Voltage rating:250V AC/DC.
2. Current rating:3.0A AC/DC.
3. Withstanding voltage:800V AC/minute.
4. Ambient temperature range:-40 ~ +85℃.
5. Insulation resistance: $\geq 1000M\Omega$.
6. Contact resistance: $\leq 20m\Omega$.
7. Applicable wire Sizes:AWG#22 ~ #28.
8. Housing①:LCP UL94-0 Natural.
9. Upper terminal②:Brass/Tin Plating.
10. Fitting Nail③:Brass/Tin Plating.